


TORAY

Product	Active Surface Area	Permeate Flow Rate	Salt Rejection
	Ft ² (m ²)	gpd (m ³ /d)	%
TMG10	76 (7.1)	1,590 (6.0) or 2385 (9.0)*	99.4

Test Conditions:

500 ppm NaCl, 100 PSI (1.6 mPa)/*150 (8.3 mPa), 77°F (25°C), pH8.0, 15.0% Recovery
 Minimum salt rejection is 99.0%
 Minimum permeate flow is 1320 (5.0)

Dimensions:

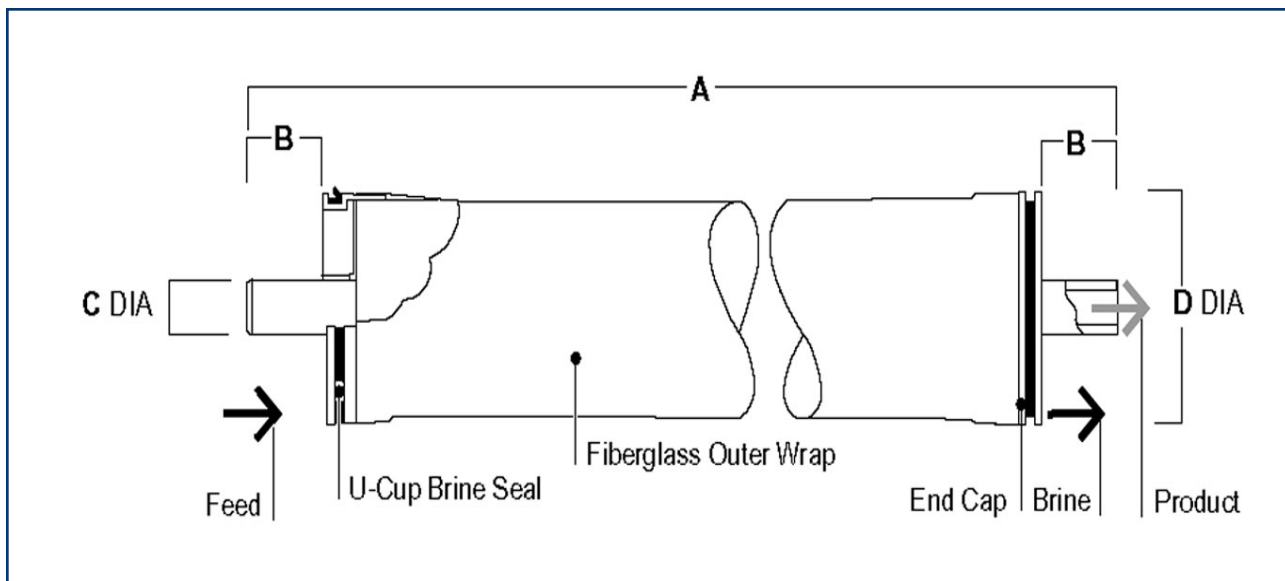

	A	B	C	D
TMG10	40 (1,016)	1.05 (27)	0.75 (19)	0.3913 (99.4)

Operating Limits:

Membrane Type Cross Linked Fully Aromatic Polyamide Composite
 Maximum Operating Pressure 365 PSI (4.1 mPa)
 Maximum Feed Water Temperature 40°C
 Maximum Feed Water Silt Density Index SDI 4
 Free Chlorine Tolerance <.1 ppm
 Feed water pH Range, Continuous Operation 3-9
 Feed water pH Range, Chemical Cleaning 2-10

Toray Membrane America, Inc.
4-inch TMG10 Low Pressure Brackish Water Elements

Operating Information:

- 1.) For the recommended design range please consult the latest Toray technical bulletin, design guidelines, computer design program, and/or Call TMA and talk with an application specialist. If operating specifications given in this Product Information Bulletin are not strictly followed, the limited warranty will be null and void.
- 2.) All elements are wet tested prior to shipment, storage solution is added and the elements are vacuum bagged in oxygen barrier bags. To prevent biological growth during short term storage, shipment, or system shutdown it is recommended that 'Toray' elements be immersed in a protective solution containing 1% (by weight) sodium metabisulfite (food grade) and permeate.
- 3.) Permeate for the first hour of operation should be discarded.
- 4.) The customer is fully responsible for the effects of chemicals, which are incompatible with the elements. Their use will void the element-limited warranty.

Toray Membranes:

Distributed By:

Applied Membranes, Inc.

2325 Cousteau Ct.
Vista, CA 92083-8346
USA

Phone: (760) 727-3711

Fax: (760) 727-4427

<http://www.AppliedMembranes.com>

Sales@AppliedMembranes.com

Notice: We accept no responsibility for results obtained by the application of this information or the safety or suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

The Toray logo consists of the word "TORAY" in a bold, blue, sans-serif font. The letters are three-dimensional with a glossy finish, giving them a metallic appearance. The letters are slightly shadowed, making them stand out against the white background. The logo is centered horizontally and is flanked by two blue, stylized arrowheads pointing outwards.